



Facili da installare

Elevata efficienza luminosa

LED integrati



Design semplice adatto a tutti gli ambienti

Compatti, occupano poco spazio

Chiusi / sigillati, non entra polvere ed insetti



Elettricamente **sicuri** ed **affidabili**

Tutti a 230V già con
alimentatore incorporato

Tutti garantiti **5 anni**







CHAMELEON




Chameleon II


Dimensions



Indoor Distribution Curve



Application



In the ceiling



Colori disponibili:  Grigio

Product	Lamps	Voltage	Frequency	Current	Power	Flux
Chameleon II	Chameleon 60	220-240V	50/60Hz	39mA	8W	600LM (warm white) 680LM (neutral white)





FLOW




Flow I


Dimensions



Indoor Distribution Curve





Application




In the ceiling

Flow III

Dimensions



Indoor Distribution Curve



Colori disponibili:  Grigio

Product	Lamps	Voltage	Frequency	Current	Power	Flux
Flow I	FLOW 90	220-240V	50/60Hz	60mA	12W	700LM (warm white) 800LM (neutral white)
Flow III	FLOW 120	220-240V	50/60Hz	90mA	18W	1200LM (warm white) 1400LM (neutral white)





FLOW2




Flow² I


Dimensions



Indoor Distribution Curve





Application




In the ceiling

Flow² III

Dimensions



Indoor Distribution Curve



Colori disponibili:  Grigio

Product	Lamps	Voltage	Frequency	Current	Power	Flux
Flow2 I	FLOW 90	220-240V	50/60Hz	60mA	12W	700LM (warm white) 800LM (neutral white)
Flow2 III	FLOW 120	220-240V	50/60Hz	90mA	18W	1200LM (warm white) 1400LM (neutral white)

CIRCLE STEP





CIRCLE STEP




Circle Step I

Dimensions




100 - 500 Lux (High)
50 - 100 Lux (Medium)
20 - 50 Lux (Low)

Indoor Distribution Curve




Average Beam Angle: 111.2°
Light Output: 1300 Lumen


Application



On the ceiling





On the wall



Under a cabinet


Circle Step II

Dimensions



100 - 500 Lux (High)
50 - 100 Lux (Medium)
20 - 50 Lux (Low)



Indoor Distribution Curve



Average Beam Angle: 109.9°
Light Output: 2100 Lumen


Circle Step III

Dimensions



100 - 500 Lux (High)
50 - 100 Lux (Medium)
20 - 50 Lux (Low)

Indoor Distribution Curve



Average Beam Angle: 109°
Light Output: 2600 Lumen

Colori disponibili:  Bianco  Grigio


Product	Lamps	Voltage	Frequency	Current	Power	Flux	
Circle Step I	LED-225G	220-240V	50/60Hz	90mA	17W	1100LM (warm white) 1200LM (neutral white)	
Circle Step II	LED-360G	220-240V	50/60Hz	135mA	29W	1800LM (warm white) 1900LM (neutral white)	
Circle Step III	LED-480G	220-240V	50/60Hz	180mA	38W	2200LM (warm white) 2400LM (neutral white)	



CORE A




LED 225G - 18W



200 - 450 Lux (High)
100 - 200 Lux (Medium)
30 - 100 Lux (Low)

Indoor Distribution Curve



Average Beam Angle: **110°**
Light Output: **1500** Lumen

Application




On the ceiling




On the wall

LED 360G - 29W



350 - 700 Lux (High)
170 - 350 Lux (Medium)
50 - 170 Lux (Low)


Indoor Distribution Curve



Average Beam Angle: **110°**
Light Output: **2300** Lumen



50mm (A290) - 52mm (A350)



Ø 290mm (A290)
Ø 350mm (A350)

Colori disponibili:



Bianco



Grigio




Product	Lamps	Voltage	Frequency	Current	Power	Flux
Core A290	LED-225G	220-240V	50/60Hz	135mA	29W	2300LM (warm white) 2200LM (neutral white)
Core A350	LED-360G	220-240V	50/60Hz	90mA	18W	1500LM (warm white) 1400LM (neutral white)



CORE S




LED 225G - 18W




200 - 450 Lux (High)
100 - 200 Lux (Medium)
30 - 100 Lux (Low)

Indoor Distribution Curve




Average Beam Angle: **110°**
Light Output: **1500 Lumen**

LED 360G - 29W



350 - 700 Lux (High)
170 - 350 Lux (Medium)
50 - 170 Lux (Low)

Indoor Distribution Curve

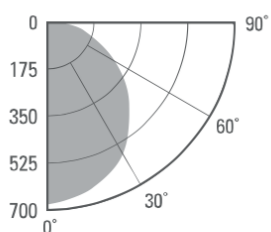

Average Beam Angle: **110°**
Light Output: **2300 Lumen**

Application



On the ceiling



On the wall



50mm (A290) - 52mm (A350)



Ø 290mm (A290)
Ø 350mm (A350)

Colori disponibili:



Bianco





Grigio





Product	Lamps	Voltage	Frequency	Current	Power	Flux
Core S290	LED-225G	220-240V	50/60Hz	135mA	29W	2300LM (warm white) 2200LM (neutral white)
Core S350	LED-360G	220-240V	50/60Hz	90mA	18W	1500LM (warm white) 1400LM (neutral white)



CRAFT

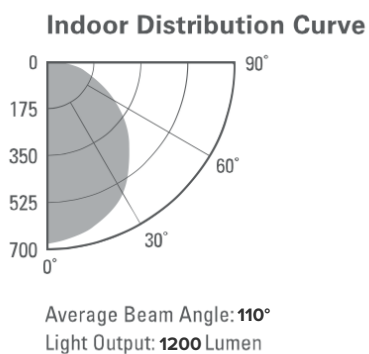

Application

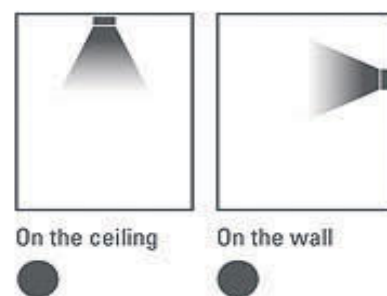



Colori disponibili:  **Trasparente**





Product	Lamps	Voltage	Frequency	Current	Power	Flux
Craft	LED-315G	220-240V	50/60Hz	90mA	18W	1200LM (warm white) 1150LM (neutral white)



FLEX BUILT ON



Application

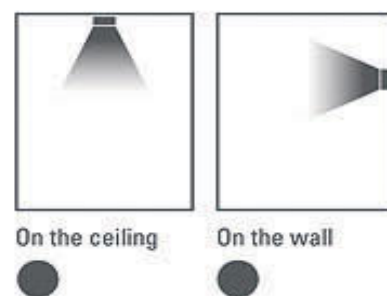

Colori disponibili:  Bianco  Grigio

Product	Lamps	Voltage	Frequency	Current	Power	Flux
Flex Built On	LED-63G	220-240V	50/60Hz	60mA	17W	1000LM (warm white) 1100LM (neutral white)





LIGNE STEP




Ligne Step


Dimensions



Indoor Distribution Curve





Application


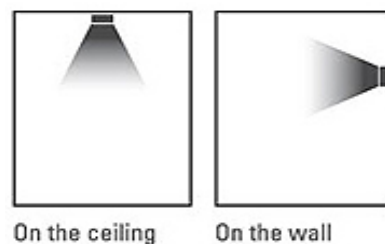


Ligne Step IV

Dimensions



Indoor Distribution Curve



Colori disponibili:



Bianco



Grigio



Product	Lamps	Voltage	Frequency	Current	Power	Flux
Ligne Step	LED-360G	220-240V	50/60Hz	150mA	29W	1800LM (warm white) 1900LM (neutral white)
Ligne Step IV	LED-480G	220-240V	50/60Hz	180mA	38W	2300LM (warm white) 2450LM (neutral white)



SLICE CIRCLE




SLICE CIRCLE

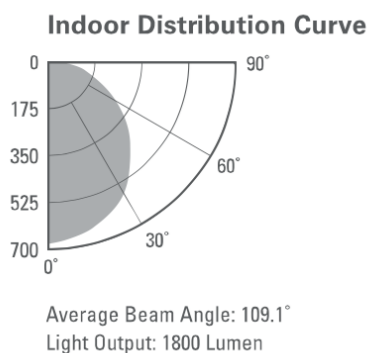

Application



On the ceiling



On the wall



50mm (15W) - 44mm (18/29W)



Ø220mm (15W) - 270mm (18/29W)

Colori disponibili:  Bianco  Grigio





Product	Lamps	Voltage	Frequency	Current	Power	Flux
Slice Circle	LED-360G	220-240V	50/60Hz	150mA	29W	1850LM (warm white) 1950LM (neutral white)
	LED-315G	220-240V	50/60Hz	90mA	18W	1100LM (warm white) 1150LM (neutral white)
	LED-162G	220-240V	50/60Hz	75mA	15W	1170LM (warm white) 1170LM (neutral white)



SLICE SQUARE




SLICE SQUARE

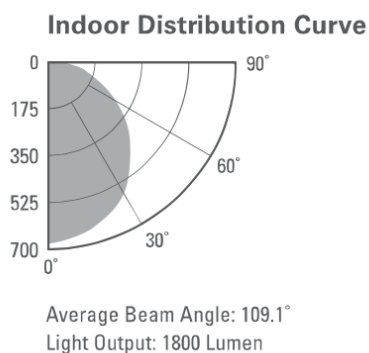

Application



On the ceiling



On the wall



50mm (15W) - 44mm (18/29W)



Ø220mm (15W) - 270mm (18/29W)

Colori disponibili:  Bianco  Grigio



Product	Lamps	Voltage	Frequency	Current	Power	Flux
Slice Square	LED-360G	220-240V	50/60Hz	150mA	29W	1850LM (warm white) 1950LM (neutral white)
	LED-315G	220-240V	50/60Hz	90mA	18W	1100LM (warm white) 1150LM (neutral white)
	LED-162G	220-240V	50/60Hz	75mA	15W	1170LM (warm white) 1170LM (neutral white)



DAEWON DIGITECH Srl
LED Lighting Division

Viale dell'Industria, 3
27020 Trivolzio (PV)
tel. +39 0382 9300.1

e-mail: dweinfo@daewon.it
www.daewon.it